


Mi Empty boxes



KF 5025

- 1.5-2.5 mm², Cu 3~





IP
66

PC

RAL
9011

RAL
9011

3
3 Wall 3
1







- with terminals
- 5-pole per pole 6 x 1.5 mm² sol, 4 x 2.5 mm² sol, 3 x 4 mm² sol
- cable entry via knockouts, order ASS separately (refer to index cable entry systems)
- "Outdoor - harsh environment and (or) outdoor"
- colour: black, RAL 9011


rated insulation voltage	AC/DC 690 V
tightening torque for terminal	1,2 Nm
Degree of protection:	IP 66
Material:	PC-GFS (polycarbonate)
width	88 mm
height:	88 mm
depth	53 mm
Weight	0,14 kg
in accordance with	IEC 60 670-22
in accordance with	Det Norske Veritas Certificate No.: E-9149 Germanischer Lloyd Certificate No.: 12 941 - 11 HH Russian Maritime Register of Shipping, technical documentation is approved by the letter No. 250-011-2-39

Drawings

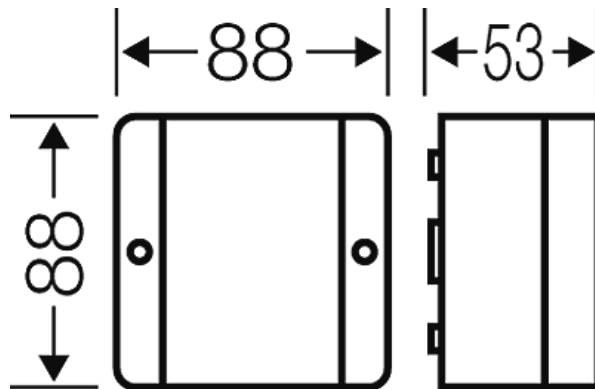Dimension drawing





Mi Empty boxes




KF 5025

- 1.5-2.5 mm², Cu 3~

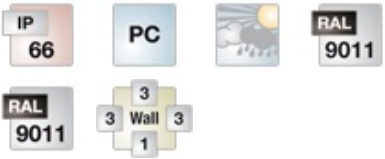




Detail mass

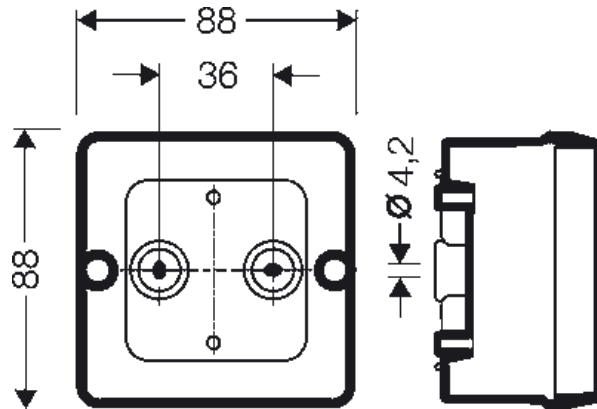









box walls



Operating and ambient conditions

Application area	Suitable for outdoor installation (harsh environment and/or outdoor). To reduce the formation and accumulation of condensed water see technical information.
Resistant to occasional cleaning procedures (direct jet)	Resistant to occasional cleaning procedures (direct jet) with high-pressure cleaner without additives, water pressure: max. 100 bar, water temperature: max. 80° C, distance => 0,15 m, in accordance with the requirements IP 69K, enclosure and cable glands at least IP 65
Ambient temperature	Average value over 24 hours + 55 °C Maximum value + 70 °C Minimum value - 25 °C
Relative humidity	50% at 40° C short-time 100% at 25° C
Fire protection in the event of internal faults	Demands placed on electrical devices from standards and laws Minimum requirements - Glow wire test in accordance with IEC 60 695-2-11: - 650°C for boxes and cable glands - 850°C for parts of insulating material necessary to retain current carrying parts in position
Burning behaviour	Glow wire test IEC 60 695-2-11: 960 °C UL Subject 94: V-0 flame resistant

Mi Empty boxes

	<p>KF 5025</p>				
	<ul style="list-style-type: none"> • 1.5-2.5 mm², Cu 3~ 				
					

self-extinguishing

Degree of protection against mechanical load	IK08 (5 Joule)
----------------------------------------------	----------------

Toxic behaviour	<p>halogen-free silicone-free "halogen-free" in accordance with the examination of the cables and insulated wires - corrosiveness of fumes - as per IEC 754-2</p>
-----------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Note:	For material properties see technical data.
-------	---------------------------------------------