


Cable junction boxes for indoor installation (normal environment and/or protected outdoor) with FIXCONNECT terminal technology



KC 9045



- 1.5-4 mm², Cu 3~

IP ESM
55

IP
65

PS



RAL
7035


- FIXCONNECT® plug-in terminal technology
- 5-pole per pole 4 x 1 x 1,5-4 mm² sol/f, terminal technology, see annex DK Cable junction boxes
- included cable entry: 4 ESM 25, sealing range Ø 9-17 mm
- for normal environment and protected outdoor
- colour: grey, RAL 7035

rated insulation voltage	AC/DC 690 V
current carrying capacity	32 A
Degree of protection:	IP 55 (ESM)
Degree of protection:	(refer to index cable entry systems) IP 65
Material:	PS polystyrene thermoplastic
width	139 mm
height:	119 mm
depth	70 mm
Weight	0,311 kg
in accordance with	IEC 60 670-22

Drawings

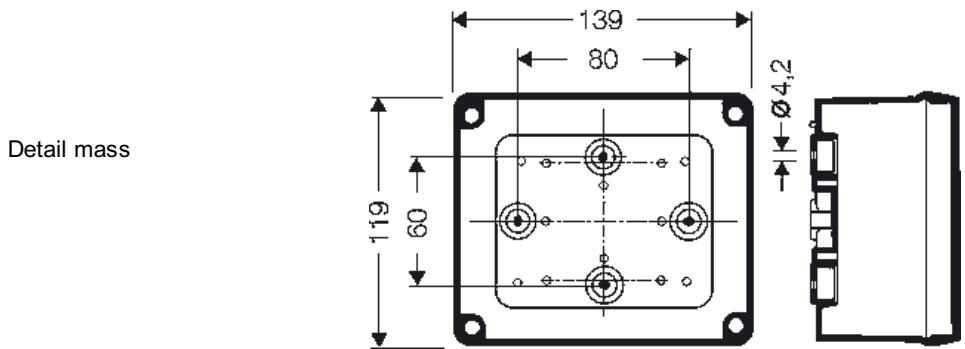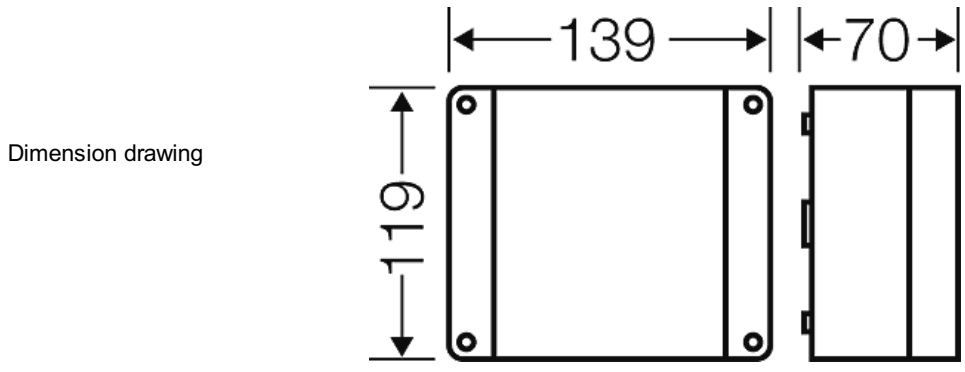

Cable junction boxes for indoor installation (normal environment and/or protected outdoor) with FIXCONNECT terminal technology



KC 9045


- 1.5-4 mm², Cu 3~


IP ESM
55







IP
65

PS

RAL
7035





			
box walls			
	1 x M 20/25 1 x M 25/32	2 x M 25/32	2 x M 20/25 1 x M 25/32

Operating and ambient conditions

Application area	Suitable for indoor installation and outdoor installation, protected against weather influences
Resistant to occasional cleaning procedures (direct jet)	Resistant to occasional cleaning procedures (direct jet) with high-pressure cleaner without additives, water pressure: max. 100 bar, water temperature: max. 80° C, distance => 0,15 m, in accordance with the requirements IP 69K, enclosure and cable glands at least IP 65
Ambient temperature	Average value over 24 hours + 35 °C Maximum value + 40 °C Minimum value - 25 °C
Relative humidity	50% at 40° C short-time 100% at 25° C
Fire protection in the event of internal faults	Demands placed on electrical devices from standards and laws Minimum requirements - Glow wire test in accordance with IEC 60 695-2-11: - 650°C for boxes and cable glands - 850°C for parts of insulating material necessary to retain current carrying parts in position
Burning behaviour	Glow wire test IEC 60 695-2-11: 750 °C UL Subject 94: V-2 flame resistant self-extinguishing
Degree of protection against mechanical load	IK07 (2 Joule)
Toxic behaviour	halogen-free silicone-free "halogen-free" in accordance with the examination of the cables and insulated wires - corrosiveness of fumes - as per IEC 754-2
Note:	For material properties see technical data.