



JUNCTION BOX

Abox-i 060-L



Abox-i 060-L

Junction box

CUSTOMIZABLE

110 x 110 x 67 mm
Article number: 49090601

Junction box - Industrial Quality - acc. DIN EN 60670 (VDE 0606), Ui=690V, weathering-proof, shock-proof, halogen-free, with IP66 double-membrane seals, M25, seal range 9 - 16 mm

grey, without terminal



Technical data

Measures

Width:	110 mm
Length:	110 mm
Height:	67 mm

Material

Base:	polycarbonate, glass fiber-reinforced
Cover:	polycarbonate, glass fiber-reinforced

Other attributes

Entries:	9
Rated cross section:	6 mm ²
Tackable:	No
Rated insulation voltage AC:	690 V

Certificates



Accessory

KVR M20-GDB/MGM

DMS M20/sw

RST M20

RST M25

HandyQuick SQ51

HandyQuick SQ81

KVR M20-MGM/sw

KVR M20-GDB/MGM/sw

KVR M25-MGM/sw

MPS-KRI

HandyQuick SQ 52

HandyQuick SQ 32

HandyClip VC 21



JUNCTION BOX

Abox-i 060-L

Explosion safety:	none
Fire protection:	none
sealable:	Yes
Weatherproof:	Yes
Heavy metals-free:	Yes
PVC-free:	Yes
Silicone-free:	Yes
Ingress protection:	IP65 - acc. EN 60529 / DIN VDE 0470-1
Equipment:	None
Color:	grey

HandyClip VC 20

HandyGrip VG 21 w

HandyGrip VG 20 w

HandyGrip VG 21

HandyGrip VG 20

KVR M25-MGM

DMS M20

AST M25

AST M20

KVR M25

KVR M20-GDB

KVR M20

GMU PA M25

GMU PA M20

ADR M25

ADR M20

WST M25

Environmental attributes


Ambient temperature (24 h):	60 °C
Ambient temperature (max.):	80 °C
Ambient temperature (min.):	-35 °C
Max. rel. humidity at 25° C (short Therm):	95%
Max. rel. humidity at 40° C:	50%



JUNCTION BOX

Abox-i 060-L

Scale Drawing

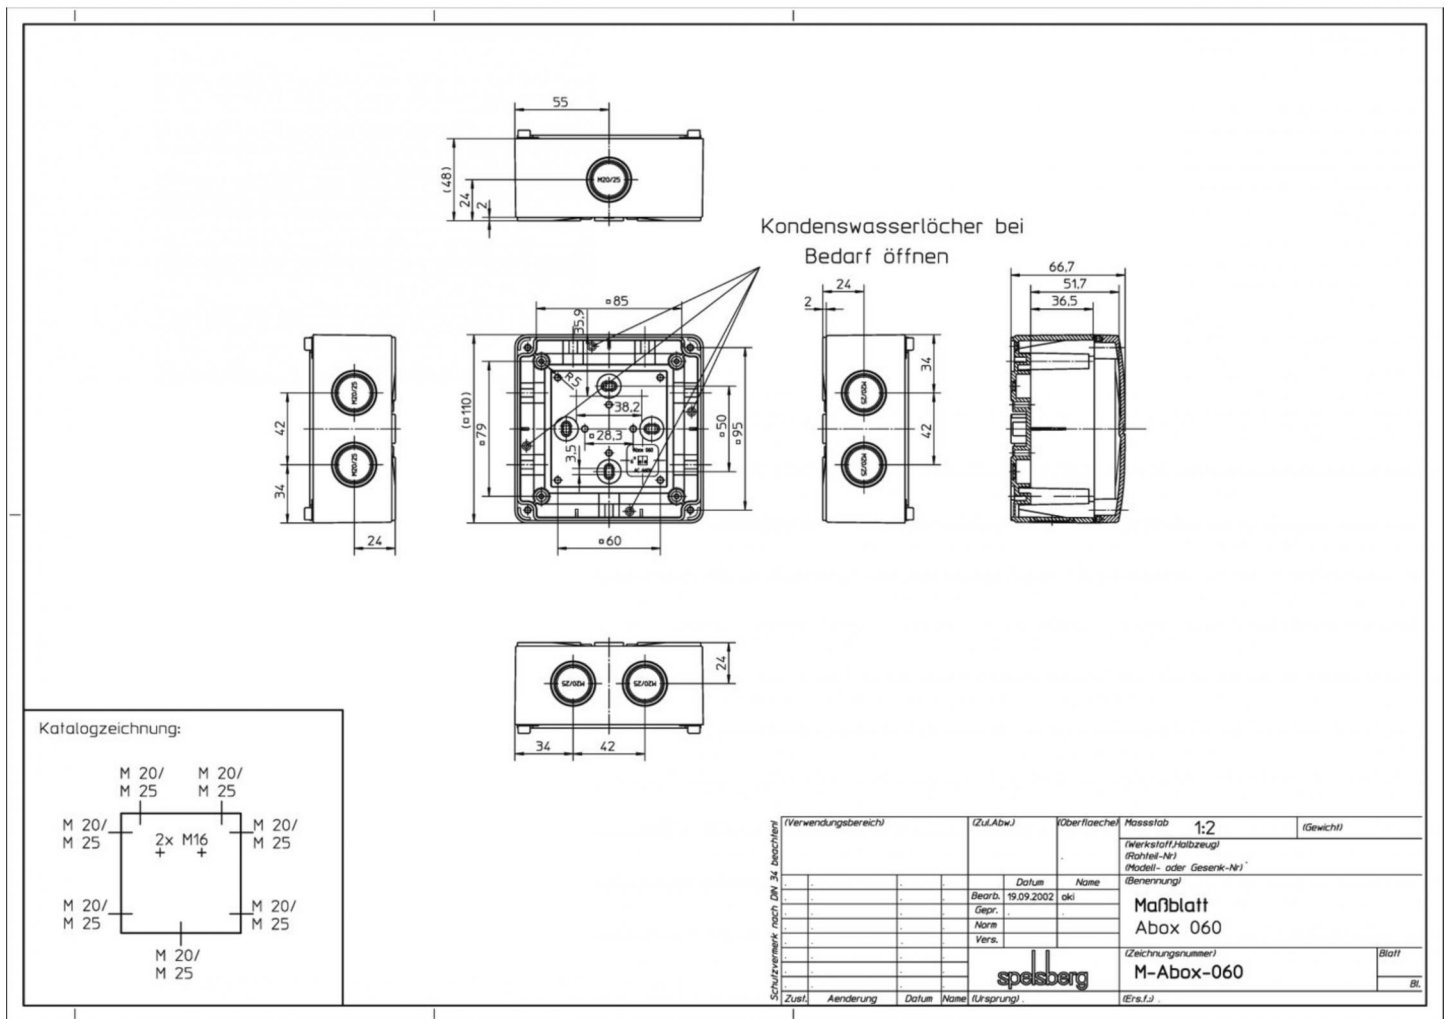

(Verwendungsbereich)	(Zu/Abw.)	(Oberfläche)	Maßstab 1:2	(Gewicht)
			(Werkstoff/Holzzeug) (Rahmteil-Nr.) (Modell- oder Geserk-Nr.)	
		Datum	Name	(Benennung)
		Bearb. 19.09.2002	oki	Maßblatt Abox 060
		Gepr.		(Zeichnungsnummer)
		Norm		M-Abox-060
		Verz.		(Blatt)
		spelsberg		Bl.
Zust.	Aenderung	Datum	Name (Ursprung)	(Ers./J.)



JUNCTION BOX

Abox-i 060-L

Scale Drawing

