


Redundancy unit CP-RUD

Accessory for CP-E range power supplies

Data sheet

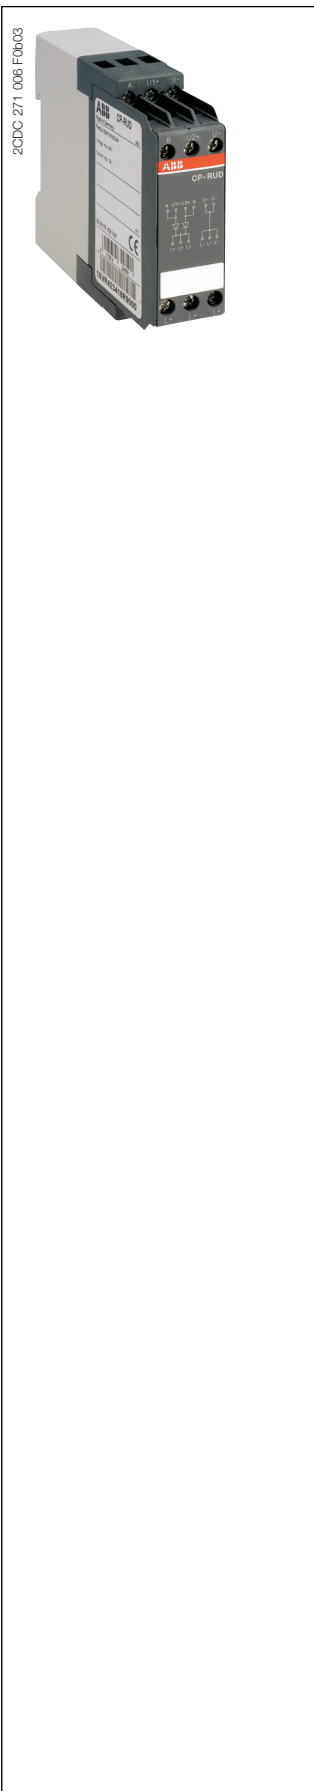

Marks

CE CE
C-Tick

Order data

Type	Description	Order code
CP-RUD	Redundancy unit The CP-RUD provides decoupling of two CP-E power supply units ≤ 35 V and < 5 A.	1SVR 423 418 R9000

Application

The redundancy unit CP-RUD provides decoupling of two CP-E power supply units ≤ 35 V and < 5 A. It has 2 inputs each up to 2.5 A and 1 output up to 5 A. It provides automatic redundant power supply operation for critical applications.

Redundancy unit CP-RUD

Accessory for CP-E range power supplies

Data sheet

Technical data

Data at $T_a = 25\text{ °C}$, $U_{in} = 230\text{ V AC}$ and rated values, unless otherwise indicated

Type		CP-RUD
Input circuit - Supply circuit		A: U1+/-U ; B: U2+/-U
Rated input voltage U_{in}		24 V DC
Input voltage range		5-35 V DC
Rated input current I_{in} per channel		0.5-2.5 A
Maximum input current per channel		10 A for 300 s
Transient overvoltage protection		no
Output circuit		L+, L+, L+, L-, L-, L-
Rated output voltage U_{out}		24 V DC
Voltage drop		typ. 0.6 V; max. 0.7 V
Rated output current I_{out}		0.5-5 A
Peak output current		20 A for 150 s
Resistance to reverse feed		< 35 V
General data		
Dimensions (W x H x D)		22.5 x 78 x 102 mm (0.89 x 3.07 x 4.02 in)
Weight		0.135 kg (0.30 lb)
Minimum distance to other units		horizontal / vertical 10 mm / 10 mm (0.39 in / 0.39 in)
Degree of protection		housing / terminals IP20 / IP20
Material of enclosure		housing shell / cover plastic / plastic
Protection class		-
Mounting		DIN rail (IEC/EN 60715)
Mounting position		horizontal
Electrical connection - Input circuit / Output circuit		
Wire size		
fine-strand with wire end ferrule		2 x 0.75-2.5 mm ² (2 x 18-14 AWG)
fine-strand without wire end ferrule		
rigid		2 x 0.5-4 mm ² (2 x 20-12 AWG)
Stripping length		7 mm (0.28 in)
Tightening torque		0.6-0.8 Nm
Environmental data		
Ambient temperature range		
operation		-20...+60 °C
rated load		-20...+60 °C
storage		-40...+85 °C
Damp heat (IEC/EN 60068-2-3)		93 % at 40 °C, no condensation
Climatic category (IEC/EN 60721)		-
Vibration (IEC/EN 60068-2-6)		
Shock (IEC/EN 60068-2-27)		
Isolation data		
Insulation voltage		between input / output / housing -
Pollution degree (EN 50178)		2
Standards		
Product standard		
Low Voltage Directive		2006/95/EC
EMC Directive		2004/108/EC
Electrical safety		EN 50178

Redundancy unit CP-RUD


Accessory for CP-E range power supplies

Data sheet

Type	CP-RUD	
Electromagnetic compatibility		
Interference immunity to	IEC/EN 61000-6-2	
electrostatic discharge	IEC/EN 61000-4-2	Level 3 (air discharge ± 8 kV, contact discharge ± 6 kV)
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	Level 3 (10 V/m)
electrical fast transient / burst	IEC/EN 61000-4-4	Level 3 (± 2 kV)
surge	IEC/EN 61000-4-5	Level 1 (± 0.5 kV)
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3 (10 V)
Interference emission	IEC/EN 61000-6-3	
high-frequency radiated	IEC/CISPR 22 / EN 55022	Class B
high-frequency conducted	IEC/CISPR 22 / EN 55022	Class B

Dimensions

in mm

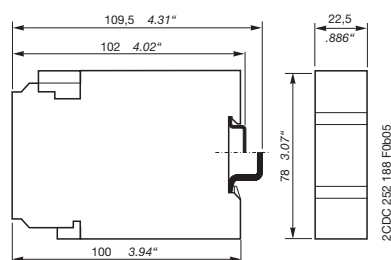

CP-RUD

Further Documentation

Document title	Document type	Document number
Electronic Products and Relays	Technical catalogue	2CDC 110 004 C020x
Power Supply Units	Application manual	2CDC 114 048 M020x
CP-E 5/3.0	Data sheet	2CDC 114 041 D0201
CP-E 12/2.5	Data sheet	2CDC 114 042 D0201
CP-E 24/0.75	Data sheet	2CDC 114 043 D0201
CP-E 24/1.25	Data sheet	2CDC 114 044 D0201
CP-E 24/2.5	Data sheet	2CDC 114 045 D0201

You can find the documentation on the internet at www.abb.com/lowvoltage → Control Products → Power Supplies

CAD system files

You can find the CAD files for CAD systems at <http://abb-control-products.partcommunity.com/PARTcommunity/Portal/abb-control-products>
 -> Low Voltage Products & Systems -> Control Products -> Power Supplies

Contact us

ABB STOTZ-KONTAKT GmbH

P. O. Box 10 16 80
69006 Heidelberg, Germany
Phone: +49 (0) 6221 7 01-0
Fax: +49 (0) 6221 7 01-13 25
E-mail: info.desto@de.abb.com

You can find the address of your
local sales organisation on the
ABB home page
<http://www.abb.com/contacts>
-> Low Voltage Products and Systems

Note:

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB AG.

Copyright© 2010 ABB
All rights reserved