

## Cable junction box "waterproof" for encapsulating




- DISCONTINUED TYPE, replacement type KF 0200 C
- without terminals
- box walls without knockouts
- wall surface can be drilled individually for cable entry max. M 20
- "weatherproof" resistant to weather influences (UV due to solar radiation, protected against rainwater, temperatur resistant, impact resistant, etc.)
- colour: black, RAL 9011

wall thickness of the bottom part	2,3 mm
Degree of protection:	IP 66
Material:	PC-GFS (polycarbonate)
mounting width	59 mm
mounting height	66 mm
max. installation depth	37 mm
width	88 mm
height:	88 mm
depth	53 mm
Weight	0,117 kg
in accordance with	IEC 60 670-22
in accordance with	Det Norske Veritas Certificate No.: E-13276 Germanischer Lloyd Certificate No.: 12 941 - 11 HH Russian Maritime Register of Shipping, technical documentation is approved by the letter No. 250-011-2-39

## Drawings

Dimension drawing

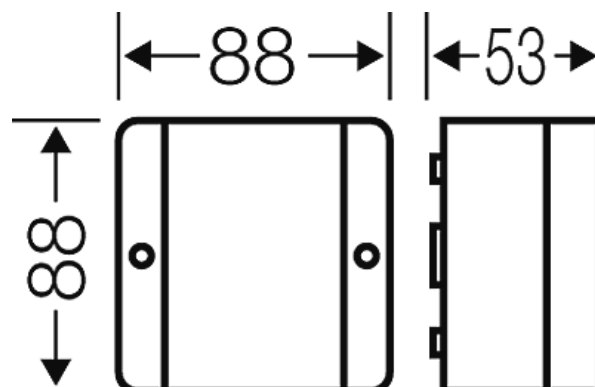

# Cable junction box "waterproof" for encapsulating



KF 4020







IP 66

PC




RAL 9011

Detail mass

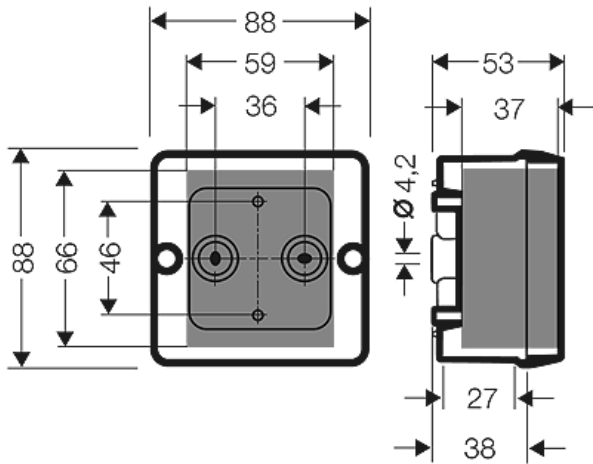

Box walls

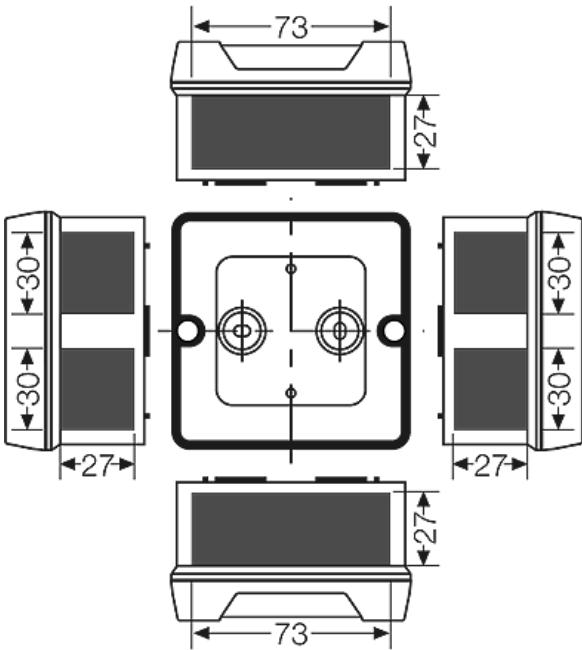

## Operating and ambient conditions

Application area	Suitable for outdoor installation (harsh environment and/or outdoor). To reduce the formation and accumulation of condensed water see technical information.
Resistant to occasional cleaning procedures (direct jet)	Resistant to occasional cleaning procedures (direct jet) with high-pressure cleaner without additives, water pressure: max. 100 bar, water temperature: max. 80° C, distance => 0,15 m, in accordance with the requirements IP 69K, enclosure and cable glands at least IP 65
Ambient temperature	Average value over 24 hours + 55 °C Maximum value + 70 °C Minimum value - 25 °C
Fire protection in the event of internal faults	Demands placed on electrical devices from standards and laws

Cable junction box "waterproof" for encapsulating



KF 4020











Minimum requirements - Glow wire test in accordance with IEC 60 695-2-11: - 650°C for boxes and cable glands - 850°C for parts of insulating material necessary to retain current carrying parts in position

Burning behaviour	Glow wire test IEC 60 695-2-11: 960 °C UL Subject 94: V-0 flame-retardant self-extinguishing
Degree of protection against mechanical load	IK08 (5 Joule)
Toxic behaviour	halogen-free silicone-free "halogen-free" in accordance with the examination of the cables and insulated wires - corrosiveness of fumes - as per IEC 60 754-2

Note: For material properties see technical data.